
# CAMBRIDGE

## MODEL SS660 SERIES STAINLESS STEEL LOW PROFILE FLOOR SCALES

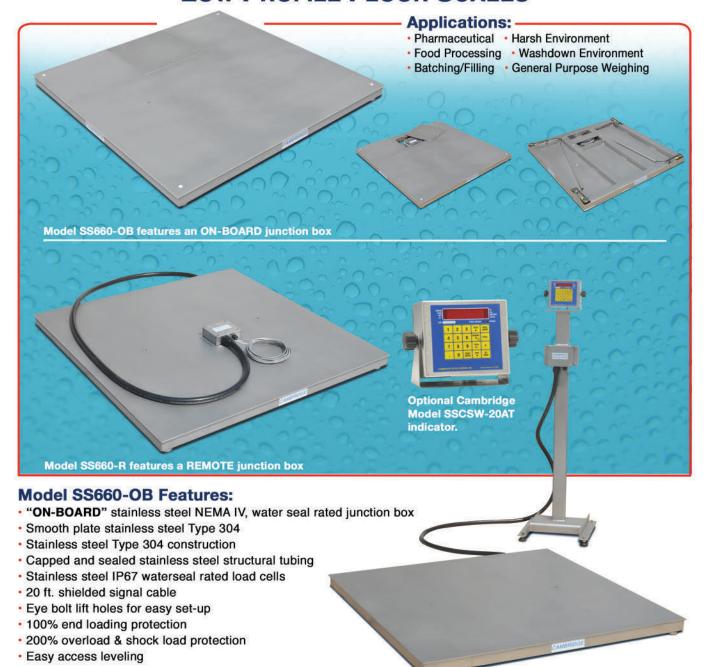

#### **Model SS660-R Features:**

All of the above except with-

 "REMOTE" stainless steel NEMA IV, water seal rated junction box and 10' Sealite flex conduit Model SS660-R shown with optional stainless steel free standing indicator column and Cambridge Model SSCSW-20AT indicator.

#### **Approvals:**





#### **Members:**

- THE NATIONAL CONFERENCE ON WEIGHTS AND MEASURES
- THE INTERNATIONAL SOCIETY OF WEIGHING AND MEASUREMENT



### MODEL SS660 SERIES STAINLESS STEEL LOW PROFILE FLOOR SCALES

Model SS660 Specifications (Standard Sizes)					
SIZE	CAPACITY	SHIP WEIGHT	SIZE	CAPACITY	SHIP WEIGHT
24" x 24" x 3"	1,000 lb.	95 lb.	48" x 60" x 3"	5,000 lb. *	385 lb.
	2,500 lb.	95 lb.		10,000 lb. *	490 lb.
30" x 30" x 3"	1,000 lb.	125 lb.	48" x 72" x 3"	5,000 lb. *	465 lb.
	2,500 lb.	125 lb.		10,000 lb. *	585 lb.
36" x 36" x 3"	1,000 lb.	180 lb.	60" x 60" x 3"	5,000 lb. *	485 lb.
	2,500 lb.	180 lb.		10,000 lb. *	600 lb.
	5,000 lb.	180 lb.	60" x 60" x 4"	20,000 lb. *	855 lb.
48" x 48" x 3"	1,000 lb.	250 lb.	60" x 84" x 4"	10,000 lb. *	1,140 lb.
	2,500 lb.	250 lb.		20,000 lb. *	1,380 lb.
	5,000 lb. *	250 lb.	MTED Approved		
	10,000 lb. *	375 lb.	<ul> <li>* NTEP Approved         Custom sizes available. Consult factory</li> </ul>		

#### **Model SS660 Stainless Steel Options:**











Diamond deck plate

Type 316 construction

Hermetically sealed and/or "FM" approved load cells

48" Indicator column (attached)

Captive ball leveling feet

# Model SS660 Stainless Steel Accessories: Model SS660-R shown with optional stainless stramp, 48" stainless steel Indicator column and m. SSCSW-10AT indicator. Bumper guard Bumper guard surround







Lag down bracket (sold individually)



Portability cart



Distributed By:

Cambridge Scale Works, Inc. will warrant this product for one full year against defects in material and/or workmanship.

