

C A M B R I D G E

MODEL SS660-PT SERIES STAINLESS STEEL LOW PROFILE "POLY-TOP" FLOOR SCALES

Applications:

- Pharmaceutical
- Food Processing
- Batching/Filling
- Harsh Environment
- Washdown Environment
- General Purpose Weighing



Model SS660-PT-OB features an ON-BOARD junction box



Model SS660-PT-R features a REMOTE junction box



Optional Cambridge
Model SSCSW-10AT
indicator.

Model SS660-PT-OB Features:

- "ON-BOARD" stainless steel NEMA IV, water seal rated junction box
- 1" thick USDA/FDA approved removeable polyethylene top
- Hand slots to remove "Poly-Top" for cleaning
- Stainless steel Type 304 construction
- Capped and sealed stainless steel structural tubing
- Stainless steel IP67 waterseal rated load cells
- 20 ft. shielded signal cable
- 100% end loading protection
- 200% overload & shock load protection
- Easy access leveling

Model SS660-PT-R Features:

All of the above except with-

- "REMOTE" stainless steel NEMA IV, water seal rated junction box and 10' Sealite flex conduit



Model SS660-PT-R shown with optional
stainless steel free standing indicator column
and Cambridge Model SSCSW-10AT indicator.

Approvals:



COC# 96-157A1



Members:

- THE NATIONAL CONFERENCE ON WEIGHTS AND MEASURES
- THE INTERNATIONAL SOCIETY OF WEIGHING AND MEASUREMENT

CAMBRIDGE

MODEL SS660-PT SERIES STAINLESS STEEL LOW PROFILE "POLY-TOP" FLOOR SCALES

Model SS660-PT Specifications (Standard Sizes)

| SIZE | CAPACITY | SHIP WEIGHT | POLY-TOP WEIGHT | SIZE | CAPACITY | SHIP WEIGHT | POLY-TOP WEIGHT |
|-------------------|--------------|-------------|-----------------|--|--------------|-------------|-----------------|
| 24" x 24" x 3.75" | 1,000 lb. | 85 lb. | 20 lb. | 48" x 60" x 3.75" | 5,000 lb. * | 335 lb. | 100 lb. |
| | 2,500 lb. | 85 lb. | 20 lb. | | 10,000 lb. * | 430 lb. | 100 lb. |
| 30" x 30" x 3.75" | 1,000 lb. | 110 lb. | 32 lb. | 48" x 72" x 3.75" | 5,000 lb. * | 405 lb. | 120 lb. |
| | 2,500 lb. | 110 lb. | 32 lb. | | 10,000 lb. * | 510 lb. | 120 lb. |
| 36" x 36" x 3.75" | 1,000 lb. | 160 lb. | 45 lb. | 60" x 60" x 3.75" | 5,000 lb. * | 425 lb. | 125 lb. |
| | 2,500 lb. | 160 lb. | 45 lb. | | 10,000 lb. * | 530 lb. | 125 lb. |
| | 5,000 lb. | 160 lb. | 45 lb. | 60" x 60" x 4.75" | 20,000 lb. * | 785 lb. | 125 lb. |
| 48" x 48" x 3.75" | 1,000 lb. | 210 lb. | 80 lb. | | 10,000 lb. * | 1,050 lb. | 175 lb. |
| | 2,500 lb. | 210 lb. | 80 lb. | 60" x 84" x 4.75" | 20,000 lb. * | 1,275 lb. | 175 lb. |
| | 5,000 lb. * | 210 lb. | 80 lb. | | | | |
| | 10,000 lb. * | 335 lb. | 80 lb. | * NTEP Approved Custom sizes available. Consult factory | | | |

Model SS660-PT Stainless Steel Options:



Type 316 construction



Hermetically sealed
and/or "FM" approved load cells



Captive ball
leveling feet




Model SSCSW-10AT




Model SSCSW-20AT

Model SS660-PT Stainless Steel Accessories:



Ramp



Pit form



Bumper guard



Bumper guard surround




48" Indicator column
(Free standing)



Lag down bracket
(sold individually)



Portability cart

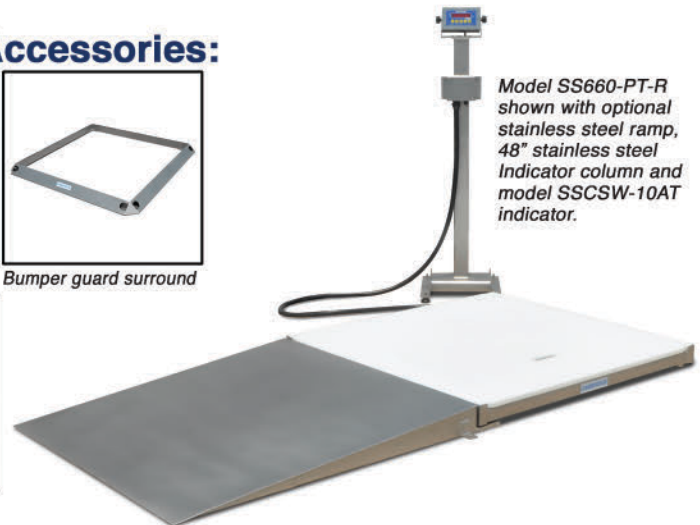

Model SS660-PT-R
shown with optional
stainless steel ramp,
48" stainless steel
Indicator column and
model SSCSW-10AT
indicator.

Distributed By:

Cambridge Scale Works, Inc.
will warrant this product for
one full year against defects
in material and/or workmanship.



Cambridge Scale Works, Inc. • P. O. Box 670 • Honey Brook, PA 19344
(800) 292-7640 • www.cambridgescale.com

© Cambridge Scale Works, Inc. 9/2017