


C A M B R I D G E

MODEL SS680 SERIES ULTRA-LO PROFILE FLOOR SCALE

Applications:


- Pharmaceutical
- Harsh Environment
- Food Processing
- Washdown Environment
- Batching/Filling
- General Purpose Weighing

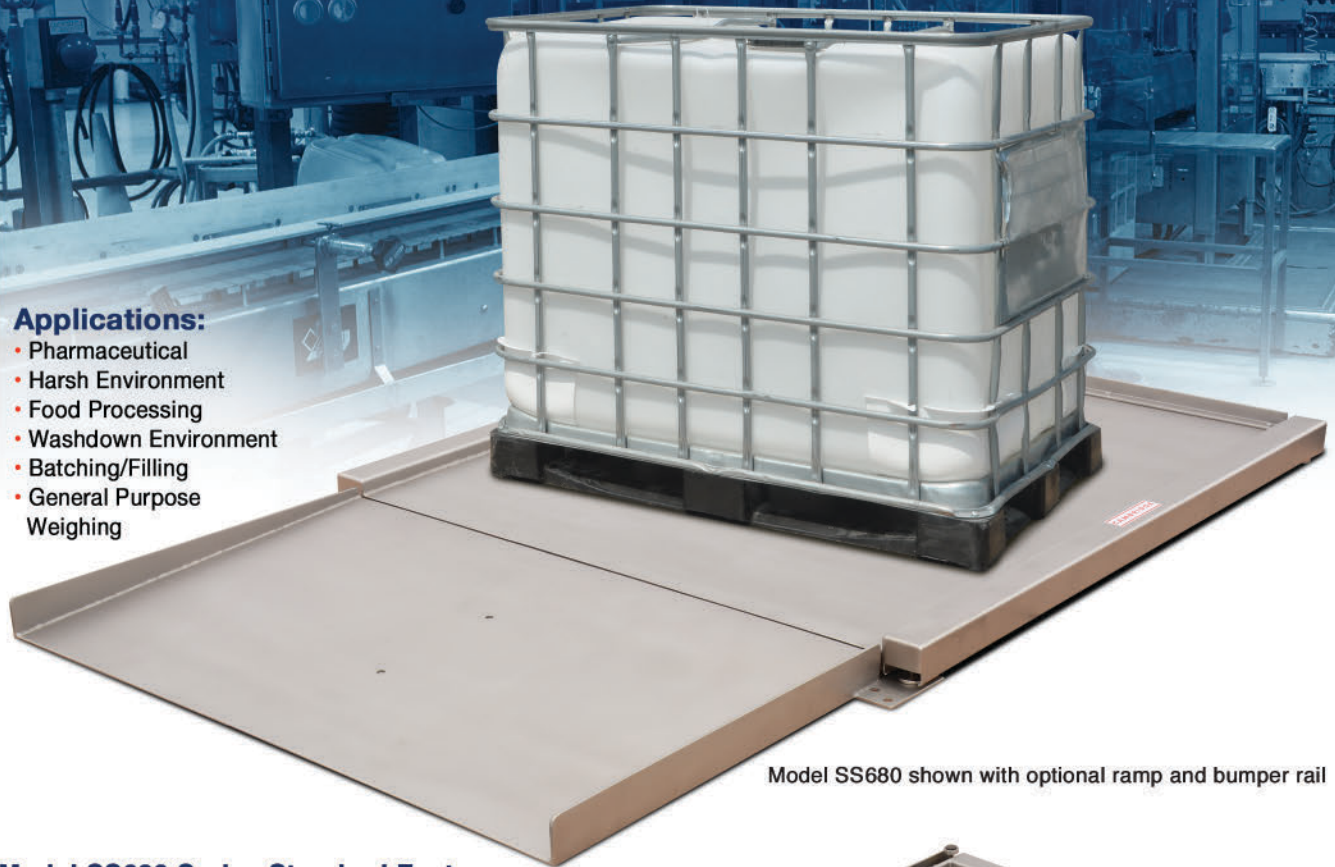

Model SS680 shown with optional ramp and bumper rail

Model SS680 Series Standard Features:

- Live safety side rails for oversized loads and roll off protection
- Structural tubular stainless steel construction
- Capped and sealed tubes throughout
- Smooth stainless steel deck plate
- Stainless steel anti-skid leveling feet
- 100% end loading capacity
- 200% overload protection
- Remote stainless steel NEMA IV junction box with ten foot Sealtite® protective conduit
- Four internally mounted NTEP certified 5000 division class III/IIIL water resistant environmentally protected IP 67 rated stainless steel load cells
- Easy access stainless steel leveling feet
- Shielded signal and load cell cables
- Ultra-lo profile design for totes, jack truck and push cart weighing
- Glass bead stainless steel finish
- 1 part in 5000 accuracy

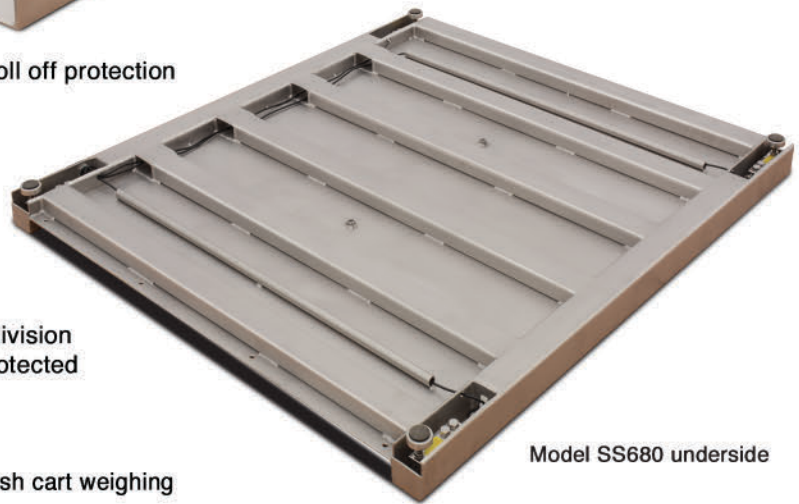

Model SS680 underside

Approvals:




Members:

- THE NATIONAL CONFERENCE ON WEIGHTS AND MEASURES
- THE INTERNATIONAL SOCIETY OF WEIGHING AND MEASUREMENT

C A M B R I D G E

MODEL SS680 SERIES ULTRA-LO PROFILE FLOOR SCALE

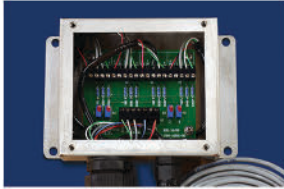

Model SS680 features remote stainless steel NEMA IV junction box.



Model SS680 features easy access, anti-skid leveling feet.



Model SS680 ramp



Model SS680 ramp underside

Model SS680 features optional easy incline ramps.

OVERALL SIZE	DECK SIZE	DECK HEIGHT	CAPACITY	APPROX. SHIP WT.
36" x 30"	30" X 30"	1.5"	1,000 lbs.	175 lbs.
36" x 30"	30" X 30"	1.5"	2,500 lbs.	175 lbs.
42" x 36"	36" X 36"	1.5"	1,000 lbs.	230 lbs.
42" x 36"	36" X 36"	1.5"	2,500 lbs.	230 lbs.
42" x 48"	36" X 48"	1.5"	1,000 lbs.	280 lbs.
42" x 48"	36" X 48"	1.5"	2,500 lbs.	280 lbs.
54" x 48"	48" X 48"	2"	5,000 lbs.	315 lbs.
54" x 48"	48" X 48"	2"	10,000 lbs.	365 lbs.
54" x 60"	48" X 60"	2"	5,000 lbs.	400 lbs.
54" x 60"	48" X 60"	2"	10,000 lbs.	460 lbs.
54" x 72"	48" X 72"	2"	5,000 lbs.	485 lbs.
54" x 72"	48" X 72"	2"	10,000 lbs.	560 lbs.
66" x 60"	60" X 60"	2.5"	5,000 lbs.	500 lbs.
66" x 60"	60" X 60"	2.5"	10,000 lbs.	580 lbs.
66" x 72"	60" X 72"	2.5"	5,000 lbs.	605 lbs.
66" x 72"	60" X 72"	2.5"	10,000 lbs.	700 lbs.
66" x 84"	60" X 84"	2.5"	5,000 lbs.	715 lbs.
66" x 84"	60" X 84"	2.5"	10,000 lbs.	850 lbs.

Model SS680 Options:

- Stainless Steel Easy Incline Ramps
- Stainless Steel Bumper Rail assembly
- Type 316 Stainless Steel
- Stainless Steel Diamond Tread Plate
- Hermetically Sealed Stainless Steel Load Cells
- "FM" Stainless Steel Load Cells



Note: Cambridge offers a full line of high quality digital indicators. Each model is offered in the standard AC power and in battery powered operation. Visit our web site for more information.

Consult factory for custom sizes and capacities • Specifications subject to change without notice

Distributed By:

Cambridge Scale Works, Inc. will warrant this product for one full year against defects in material and/or workmanship.



Cambridge Scale Works, Inc. • P O Box 670 • Honey Brook, PA 19344
(800) 292-7640 • (610) 273-7040 • www.cambridgescale.com