

# B3G

- Stainless steel IP67 "S" type load cell
- Tension and compression applications
- Suitable for hanging, hopper and other weighing devices
- Also available in imperial capacities and other dimensions
- OIML test certificate no. D09-06.07
- OIML C of C no. R60/2000-CN1-06.02
- NTEP certificate no. 06-099A1


### Features

- Capacities: 50kg~10t;50lb~20Klb
- High accuracy
- Stainless steel construction
- Low profile




Specifications				
Capacity	t	50kg/100kg/250kg/500kg/1t/2.5t/5t/7.5t/10t		
	lb	50/75/100/150/200/250/300/500/750/1k/1.5k/2k/2.5k/3k/5k/10k/15k/20k		
Accuracy		C3	N3	N10
Maximum Number of Verification Intervals	Nmax	3000	3000	10000
Minimum Number of Verification Intervals	Vmin	Emax/10000	Emax/3000	Emax/10000
Output Sensitivity	(mV/V)	3.0±0.008		
Input Resistance	(Ω)	430±60		
Output Resistance	(Ω)	351±2		
Insulation Resistance	(MΩ)	≥5000 (50VDC)		
Zero Balance	(%FS)	1.0		
Temperature, Compensated	(°C)	-10~+40		
Temperature, Operating	(°C)	-35~+70		
Excitation, Recommended	(V)	5~12 (DC)		
Excitation, Max	(V)	18 (DC)		
Safe Overload	(%FS)	150		
Ultimate Overload	(%FS)	300		

### Dimensions in mm (in)



Outline Dimensions mm (inch)						
Dimension (mm)	L	H	W1	W	M	H1
Capacity						
50kg, 100kg 50lb~300lb	50.8 (2.0)	60.96 (2.4)	11.68 (0.46)	15.06 (0.59)	M6	8.89 (0.35)
					1/4-28UNF	
250kg, 500kg 500lb~1.5klb	50.8 (2.0)	60.96 (2.4)	18.03 (0.71)	21.4 (0.84)	M12	8.89 (0.35)
					1/2-20UNF	
1t 2, 2.5Klb	50.8 (2.0)	60.96 (2.4)	24.38 (0.96)	27.76 (1.09)	M12	8.89 (0.35)
					1/2-20UNF	
2.5t 3Klb	76.2 (3.0)	99.06 (3.9)	24.38 (0.96)	27.76 (1.09)	M20x1.5	13.97 (0.55)
					1/2-20UNF	
5t 10Klb	74.68 (2.94)	99.06 (3.9)	30.74 (1.21)	34.12 (1.34)	M20x1.5	18.37 (0.72)
					3/4-16UNF	15.75 (0.62)
7.5t 15Klb	87.38 (3.44)	139.7 (5.5)	37.08 (1.46)	40.46 (1.59)	M24x2	27.5 (1.08)
					1-14UNS	
10t 20Klb	112.78 (4.44)	177.8 (7.0)	42.93 (1.69)	46.31 (1.82)	M30x2	39.9 (1.57)
					1 1/4-12UNS	
5klb	76.2 (3.0)	99.06 (3.9)	24.38 (0.96)	27.76 (1.09)	3/4-16UNF	13.97 (0.55)

### Wiring

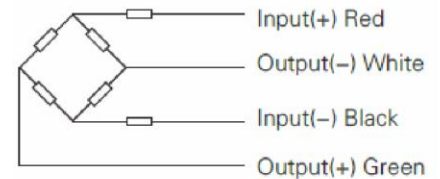

- Shielded, 4 conductor cable
- Cable diameter: 0.2in
- Standard cable length: 6m
- Shield not connected to element

# **C A M B R I D G E**

## **ZEMIC** **LOAD CELLS**

<b><u>MODEL</u></b>	<b><u>DESCRIPTION</u></b>	<b><u>CAPACITY</u></b>	<b><u>LIST</u></b>
<b>B3G-N10- XX-6YB</b>	<b>STAINLESS STEEL "S" TYPE LOAD CELL NTEP</b>	<b>50 LB.</b>	<b>\$ 290.</b>
		<b>75 LB.</b>	<b>\$ 290.</b>
		<b>100 LB.</b>	<b>\$ 290.</b>
		<b>150 LB.</b>	<b>\$ 290.</b>
		<b>200 LB.</b>	<b>\$ 290.</b>
		<b>250 LB.</b>	<b>\$ 290.</b>
		<b>300 LB.</b>	<b>\$ 290.</b>
		<b>500 LB.</b>	<b>\$ 290.</b>
		<b>750 LB.</b>	<b>\$ 290.</b>
		<b>1,000 LB.</b>	<b>\$ 290.</b>
		<b>1,500 LB.</b>	<b>\$ 290.</b>
		<b>2,000 LB.</b>	<b>\$ 350.</b>
		<b>2,500 LB.</b>	<b>\$ 350.</b>
		<b>3,000 LB.</b>	<b>\$ 350.</b>
		<b>5,000 LB.</b>	<b>\$ 550.</b>
		<b>10,000 LB.</b>	<b>\$ 590.</b>
<b>15,000 LB.</b>	<b>\$ 990.</b>		
<b>20,000 LB.</b>	<b>\$ 1,390.</b>		

INTERCHANGE WITH:  
REVERE MODEL - 9363

**F.O.B.: HONEY BROOK, PA**

**PRICES EFFECTIVE: 01/01/18**

**PRICES SUBJECT TO CHANGE WITHOUT NOTICE**